



**FIAS SPECIFICATION SHEET
SAMBO BACKNUMBER MANUFACTURING**

Moscow – 2018

CONTENT

I. REQUIREMENTS ON BACKNUMBER MANUFACTURING	3
2.1 Appearance	3
2.2 Sizes and application	3
2.3 Fabric characteristics	3
II. MANUAL FOR APPLICATION (SEWING TECHNIQUES)	4
APPENDICES	5

This document regulates the requirements for a sambo backnumber to be used at the FIAS official events.

I. REQUIREMENTS ON BACKNUMBER MANUFACTURING

1.1 Appearance



1.2 Sizes and application

- a) a backnumber should be a horizontal rectangle of the size 20x35 centimeters;
- b) an athlete name should be located at the top of the backnumber;
- c) for last name application maximum of 15 characters may be used (including letters, spaces, and dots);
- d) a country code is located in the bottom half of the backnumber;
- e) a name and a country code are centered on a backnumber and the font **Arial Black** is applied (PANTONE Black).

The main sizes of a backnumber are present in the **Appendix 1**.

1.3 Fabric characteristics


- a) material – is thin, matte, opaque, synthetic fabric;
- b) (GSM) density: not less than 140 but not more than 200 g/m²;
- c) durability – high;
- d) thickness of 0.1-0.4 mm;
- e) wear resistance – high;
- f) color – white (PANTONE White);
- g) color permanence – high;
- h) texture of the fabric is homogeneous, smooth, soft;
- i) so that the fabric fibers do not come unplaited, the edges of a backnumber must be heat treated (soldered);

- j) the edges of a backnumber should not be rough or sharp;
- k) health-friendly substances shall be used for the production of a backnumber;
- l) any coating of a backnumber shall be resistant to abrasion and deformation and shall not be painted.

II. MANUAL FOR APPLICATION (SEWING TECHNIQUES)

- a) backnumber should be located on the back of the SAMBO jacket in the center, at a distance of 3 cm from the bottom of the collar;
- b) a backnumber is sewn with white thread using a sewing machine;
- c) the sewing line should be straight and run along the outer edges of a backnumber 3-5 mm from the edge;
- d) after application on the jacket, a backnumber should not have wrinkles.

Manual

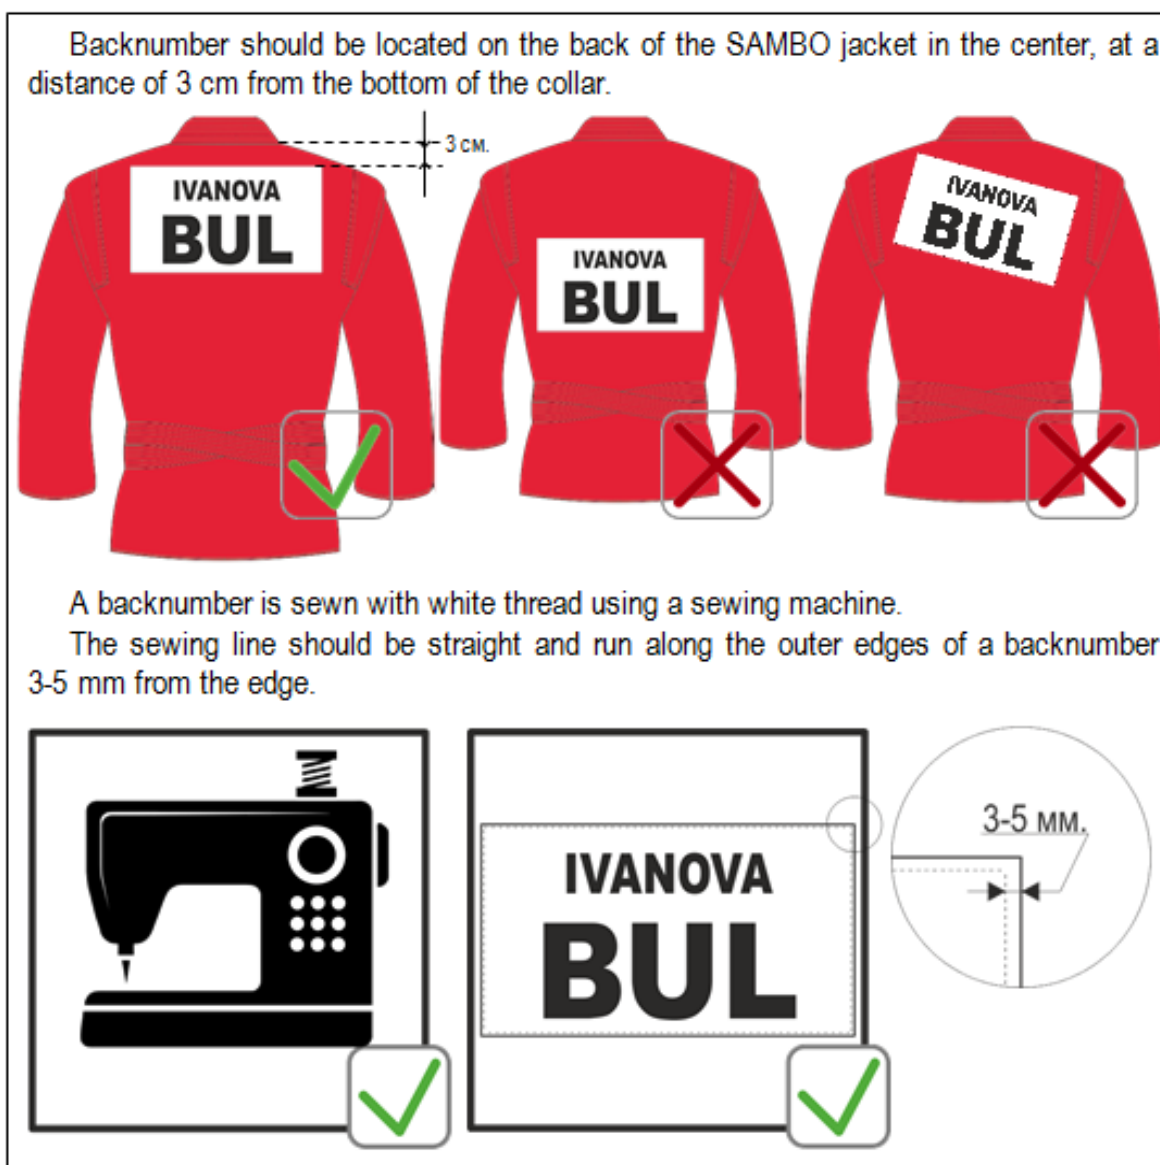

The general sizes of a backnumber

